



**CITY OF LODI  
COUNCIL COMMUNICATION**

**AGENDA TITLE:** Approve Plans and Specifications and Authorize Advertisement for Bids for Hale Park Sports Court Resurfacing Project, 209 East Locust Street

**MEETING DATE:** March 6, 2013

**PREPARED BY:** Public Works Director

---

**RECOMMENDED ACTION:** Approve plans and specifications and authorize advertisement for bids for Hale Park Sports Court Resurfacing Project, 209 East Locust Street.

**BACKGROUND INFORMATION:** Acrylic court surfaces have a useful life of approximately ten years under normal conditions. The Hale Park sports courts were last resurfaced in 2002 and are again in need of resurfacing.


The Hale Park Sport Court Resurfacing Project includes resurfacing two sports courts at Hale Park (Exhibit A). The project consists of surface preparation and resurfacing of approximately 17,900 square feet of basketball and handball court surface, re-stripping the game lines, and modifying portions of the existing chain-link fencing around the perimeter of the court area.

The bid opening is scheduled for March 27, 2013. Following Council award of the project, construction is anticipated to begin mid-May.

It is recommended Council approve plans and specifications and authorize advertisement for bids for the Hale Park Sports Court Resurfacing Project.


**FISCAL IMPACT:** Aside from the Capital expenditure, the fiscal impact will be negligible.


**FUNDING AVAILABLE:** Funding will be identified at project award.

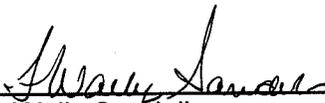  
\_\_\_\_\_  
F. Wally Sardelin  
Public Works Director

Prepared by Charles E. Swimley, Jr., City Engineer/Deputy Public Works Director  
FWS/CES/pmf  
Attachment

---

**APPROVED:**   
\_\_\_\_\_  
Konradt Bartlam, City Manager

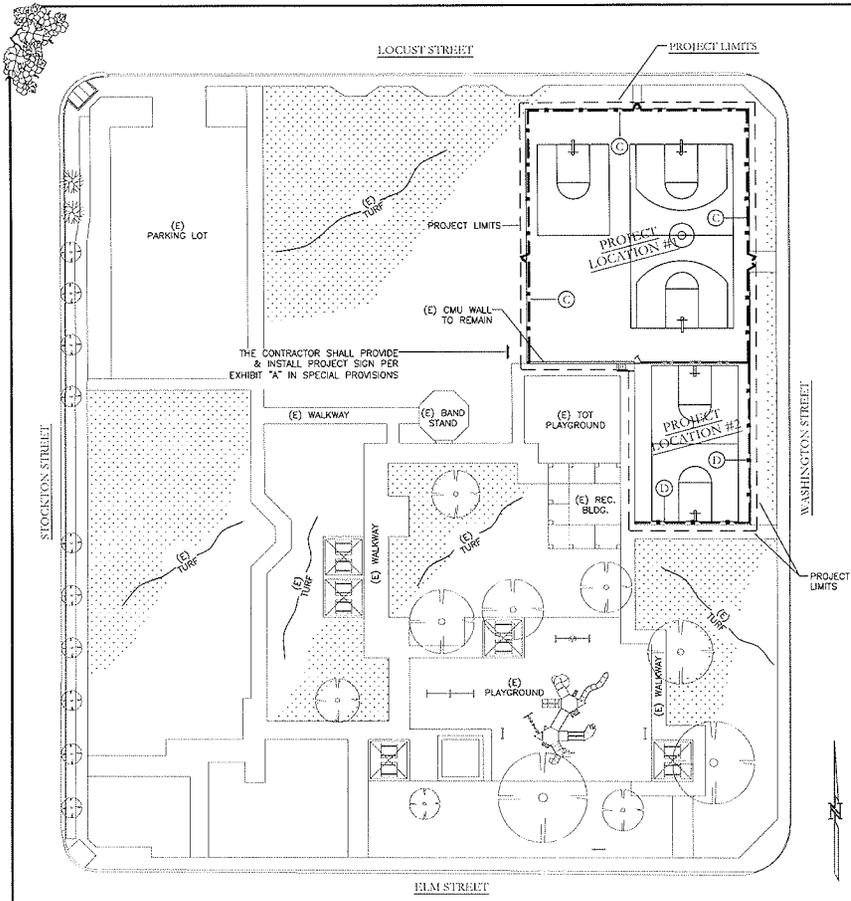

Hale Park - Project Location  
Scale 1"=30'

HALE PARK COURT RESURFACING PROJECT NOTES

THIS PROJECT CONSISTS OF (2) PROJECT LOCATIONS WITHIN THE EXISTING PARK SITE.

LOCATION #1 CONCRETE SLAB RESURFACING

A. THE CONTRACTOR SHALL PROVIDE AND INSTALL APPROXIMATELY 13,399 SQUARE FEET OF NEW ACRYLIC SPORTS COURT SURFACING AND NEW GAME LINES AS LAID OUT PER THE PLANS AND SPECIFICATIONS. THE EXISTING COURT IS A 4 INCH THICK CONCRETE SLAB WITH EXPANSION JOINTS. THIS LOCATION SHALL RECEIVE (1) 50'x94' FULL BASKETBALL COURT AND (1) 35'x45' HALF BASKETBALL COURT WITH PERIMETER APRONS.

LOCATION #2 ASPHALT SLAB RESURFACING

B. THE CONTRACTOR SHALL PROVIDE AND INSTALL APPROXIMATELY 4,480 SQUARE FEET OF NEW ACRYLIC SPORTS COURT SURFACING AND NEW GAME LINES AS LAID OUT PER THE PLANS AND SPECIFICATIONS. THE EXISTING COURT IS A 2 INCH THICK COMPACTED ASPHALT SLAB WITHOUT JOINTS. THIS LOCATION SHALL RECEIVE (1) 42'x74' MODIFIED FULL BASKETBALL COURT WITH PERIMETER APRONS.

PROJECT CONDITIONS THAT APPLY TO BOTH PROJECT LOCATIONS

1. EXISTING BASKETBALL COURT CHAIN LINK FENCING AND GATES SHALL REMAIN.
2. EXISTING BASKETBALL STANDARDS SHALL REMAIN.
3. EXISTING SPORTS LIGHTING STANDARDS SHALL REMAIN.
4. EXISTING CMU MASONRY WALL TO REMAIN.

HALE PARK FENCING PROJECT NOTES


THIS PROJECT CONSISTS OF (2) PROJECT LOCATIONS WITHIN THE EXISTING PARK SITE.

LOCATION #1:

C. THE CONTRACTOR SHALL REMOVE AND DISPOSE OF APPROXIMATELY 410 LINEAL FEET OF EXISTING BOTTOM TENSION WIRE AND INSTALL APPROXIMATELY 410 LINEAL FEET OF NEW 1.66" O.D. SS-40 BOTTOM RAIL PIPE WITH APPROPRIATE HARDWARE WHICH WOULD INCLUDE BRACE BANDS, RAIL ENDS, BOLTS, NUTS AND NEW TIE WIRE TO SECURE THE EXISTING CHAIN LINK FABRIC TO NEW BOTTOM RAIL.

LOCATION #2:

D. THE CONTRACTOR SHALL REMOVE AND DISPOSE OF APPROXIMATELY 136 LINEAL FEET OF EXISTING BOTTOM TENSION WIRE AND INSTALL APPROXIMATELY 136 LINEAL FEET OF NEW 1.66" O.D. SS-40 BOTTOM RAIL PIPE WITH APPROPRIATE HARDWARE WHICH WOULD INCLUDE BRACE BANDS, RAIL ENDS, BOLTS, NUTS AND NEW TIE WIRE TO SECURE THE EXISTING CHAIN LINK FABRIC TO NEW BOTTOM RAIL.

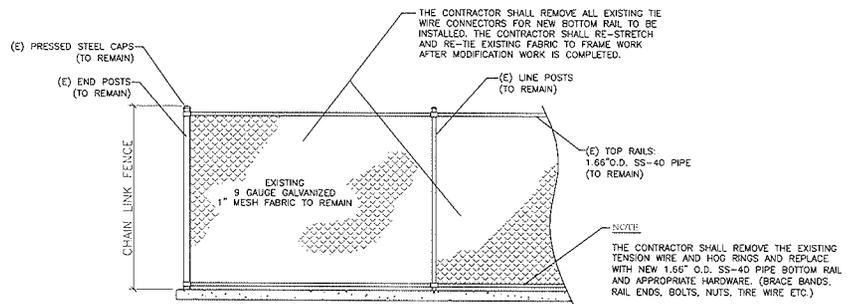

Chain Link Fence Retrofit Work (See Sheet C3)  
SCALE: 1/2"=1'-0"

DATE	BY	REVISIONS	JOB NO.	JOB DATE	JOB TIME	JOB COST	JOB PROFIT	JOB TOTAL

**CITY OF LODI**  
PARKS & RECREATION  
DEPARTMENT  
125 N. STOCKTON STREET  
LODI, CA 95240  
PHONE: (209) 431-5432  
FAX: (209) 431-5433  
WWW.LODI.CA.GOV

**Hale Park Court Resurfacing**  
2012 CDBG Project  
Location Plan & General Notes

DATE	2/3/2014
PROJECT	002 of 003
SHEET	C2
JOB NO.	013D0012-02